


# 10 54.6V15A

819W Intelligent charger



MODEL:XT80

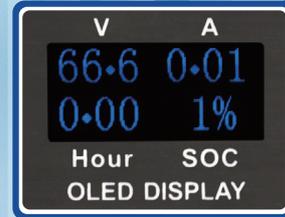


UL62368-1, TUV EN62368-1, EN55032 /EN55035 FCC PART 15B, J62368-1(2020), J55032(H29); J3000(H25).

## FEATURE

- ▶ Charger for Li-Ion batteries(lithium iron, lithium manganese and Li-NiCoMn) and lead-acid batteries(flooded, Gel and AGM)
- ▶ **AC input range:** 90VAC~264VAC 45~65HZ
- ▶ **Efficiency:** ≥90%      ▶ **Weight:** 2.5kg      ▶ Aluminum shell case
- ▶ **Protections:** Short circuit/Over voltage/Over power/Over temperature /reverse polarity/No spark
- ▶ **Operating temperature:** -20~40°C(-4°F~104°F)
- ▶ MCU embedded intelligent control      ▶ Cooling by fan
- ▶ Built-In Active PFC, PF>0.9@220VAC      ▶ Optional with OLED display
- ▶ Support CAN2.0B and RS-485 Communication Interface

## SIZE

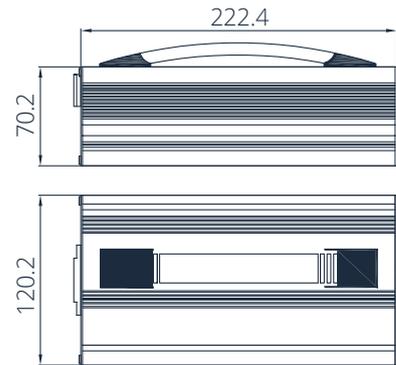

Model	Output Voltage(V)	Output Current(A)	Max.outputpower(W)
XT80VxxxAyyy	3.3-16.8	0.1-30	504
	16.9-29.4	0.1-25	735
	29.5-42	0.1-18	756
	42.1-44.1	0.1-17	749.7
	<b>44.2-54.6</b>	<b>0.1-15</b>	<b>819</b>
	54.7-58.8	0.1-13	764
	58.9-73.5	0.1-10	735
	73.6-84	0.1-10	840
84.1-96.6	0.1-8.7	840.4	